Champion®
The Dishwashing Machine Specialists

Project_____
Item No._____
Quantity_____

1536-B RACKWASHER

1536-B
Walk-in Rackwasher

STANDARD FEATURES

- Rugged stainless steel construction
- Self-contained water heating
- Double-skinned, hinged door design
- Recirculating wash water
- User-friendly, push-button operation
- 5 minute wash/rinse cycle
- Fresh water sanitizing rinse
- Digital control & information center
- Moisture-resistant control gauges
- Precision engineered spray arm assembly
- 36 or 48 pan capacity
- Easy-to-clean filtration system
- Standard and custom wash racks
- Designed for pit or ramp installations
- Adjustable wash & rinse cycles
- Two year warranty program

OPTIONS & ACCESSORIES

☐ Fold-away ramp system
☐ Steam extraction fan
☐ Wash-down hose & spray gun

Additional Lift Door and Split Door Models:


☐ 1527


☐ 1536-N


☐ 2048


☐ 3060

SPECIFIER STATEMENT

Specified unit will be Champion model 1536-B Rackwasher. Features average wash/rinse cycle of 5 seconds, recirculated wash water, digital control and information center. Constructed of stainless steel. One year parts and labor.

Champion Industries, Inc.
P. O. Box 4149, Winston-Salem, NC 27115
Tel: 336/661-1556 Fax: 336/661-1979
www.championindustries.com

DG020
(3M) 05/03 Printed in U.S.A.

1536-B

Walk-in Rackwasher

Champion®
The Dishwashing Machine Specialists

Dimensions shown in inches and [millimeters]

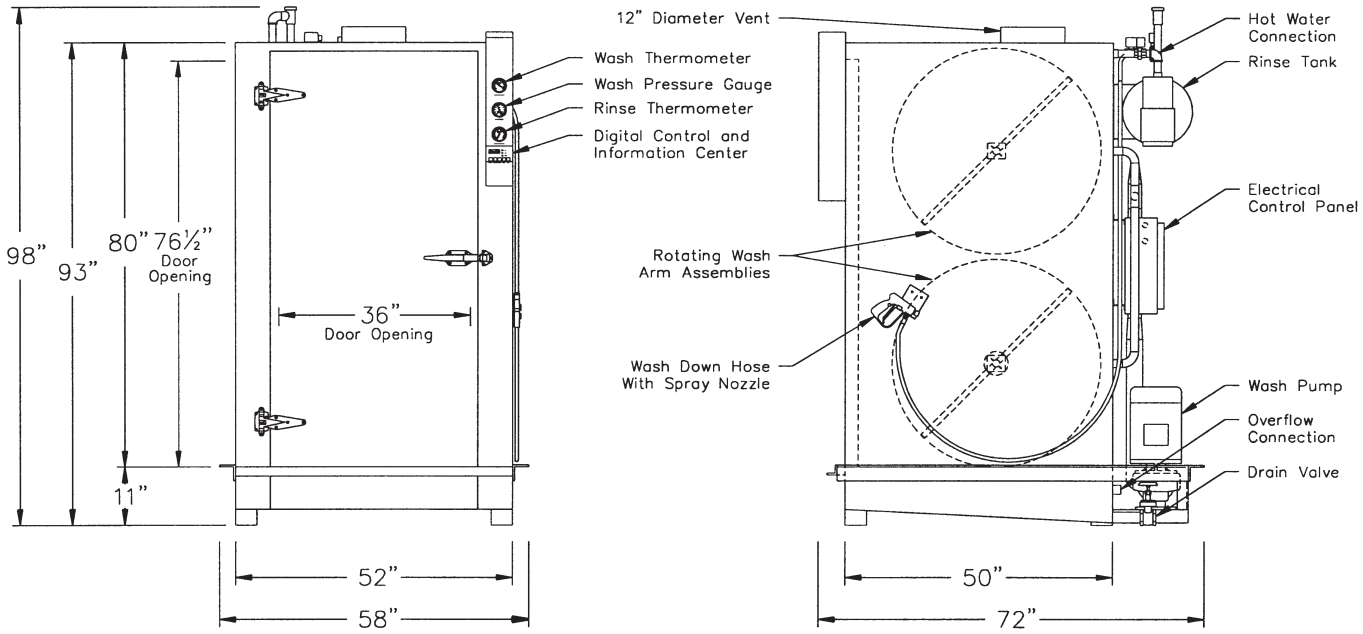

Warning: Plumbing and electrical connection should be made by qualified personnel who will observe all the applicable plumbing, sanitary and safety codes and the National Electrical Code.

Note: Water Hammer Arrestor (meeting ASSE-1010 standard or equivalent) to be supplied (by others) in common water supply line at service connection.

SPECIFICATIONS

Door
Double skinned, STAINLESS STEEL hinged door design with exterior latch and inside release handle.

Recirculating Wash Tank
STAINLESS STEEL with electric, infrared gas, live steam or steam coil heating, thermostatically controlled, low water protected, sloped to drain with a 75 gallon capacity (67 gallons if infrared gas heated).

Rinse Tank
STAINLESS STEEL with electric, infrared gas or steam coil booster heater to provide 180°/190° hot sanitizing rinse. Uses 12 gallons per 30 second cycle.

Filter
Perforated, STAINLESS STEEL screen type. Double filtration system for increased effectiveness and easy cleaning without emptying the tank.

Spray Arm Assembly
STAINLESS STEEL spray arm assembly with STAINLESS STEEL jets, removable end caps and hand operated quick release mechanism for easy cleaning and reassembly.

Water Pump
15 H.P., 208/240 or 480 volt, 3 phase, 60 cycle with output of 250 gallons per minute at 35 to 45 P.S.I.

Digital Control & Information Center
110 volt control circuit with push pad operation of “POWER ON”, “STOP” and “SHORT, MEDIUM or LONG WASH CYCLES”. A digital display indicates “TIME REMAINING” for each cycle. LED’s indicate wash, rinse and unload functions. A buzzer is also included to provide an audible indication of time to unload. A programmable controller allows the push pad to be used as a “DIAGNOSTIC CENTER” by displaying “ERROR CODES” for ease of troubleshooting.

Gauges
Moisture resistant gauges measure Wash Temperature, Wash Pressure and Rinse Temperature.

Racks
STAINLESS STEEL built to match specific washing requirements

Due to an ongoing value analysis program at Champion, specifications contained in this catalog are subject to change without notice.

Champion Industries, Inc., P. O. Box 4149, Winston-Salem, NC 27115 • 336/661-1556 • Fax: 336/661-1979 • www.championindustries.com