

ATTENTION ELECTRICIANS

FAILURE TO FOLLOW THESE INSTRUCTIONS WILL VOID WARRANTY!

HT
MODELS

0514005 - REV A - 8-SEPT-2014



Electrical connections must be made AFTER all plumbing installation instructions have been completed.


All electrical connections must be made by qualified installers familiar with food service equipment in accordance with all local electrical codes.

All electrical connections must be positioned to allow the unit to be removable for service and cleaning.

1


- Check data plate for electrical power requirements and verify breaker size meets requirement in manual.

- Remove front panel to access internal components for installation.

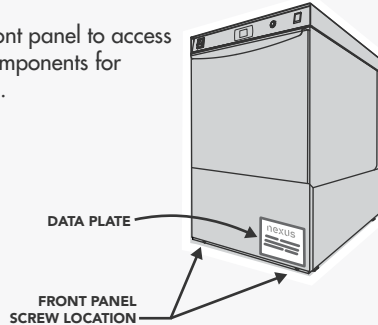


2

- Remove the bottom screw covering the terminal enclosure to gain access to terminal strip.

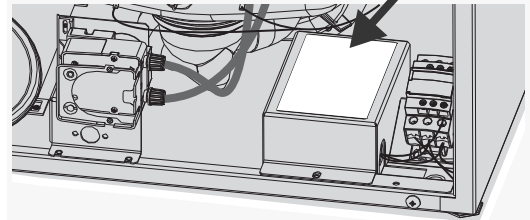

3


- Make the required connections to the terminal strip.
- Ensure the wire is fed through the middle slot of the rear panel and that it is secured to the electrical enclosure with the appropriate strain relief bushing.

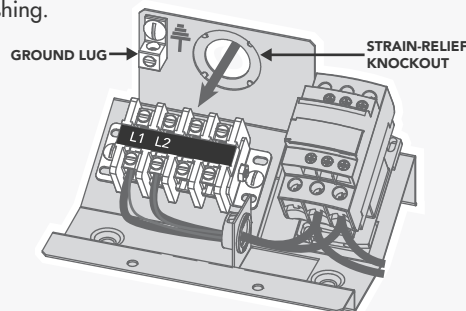

208-230V / Ø1

2 WIRE PLUS GROUND

WIRE RATED MIN 190°F (88°C)





- ! **You must** leave 30" of wire to allow the machine to be pulled from it's installed position for servicing.

- Replace front lower panel. Installation is complete!

4

WARNING

Power switch must remain in "OFF" Position



For the next step:

- Filling booster tank

- Ensure power switch is "OFF".
- Ensure circuit breaker is "ON".
- Push the green start button and hold for 5 seconds.
- Water will fill booster tank.
- Continue to push and hold until water enters the washtank.