
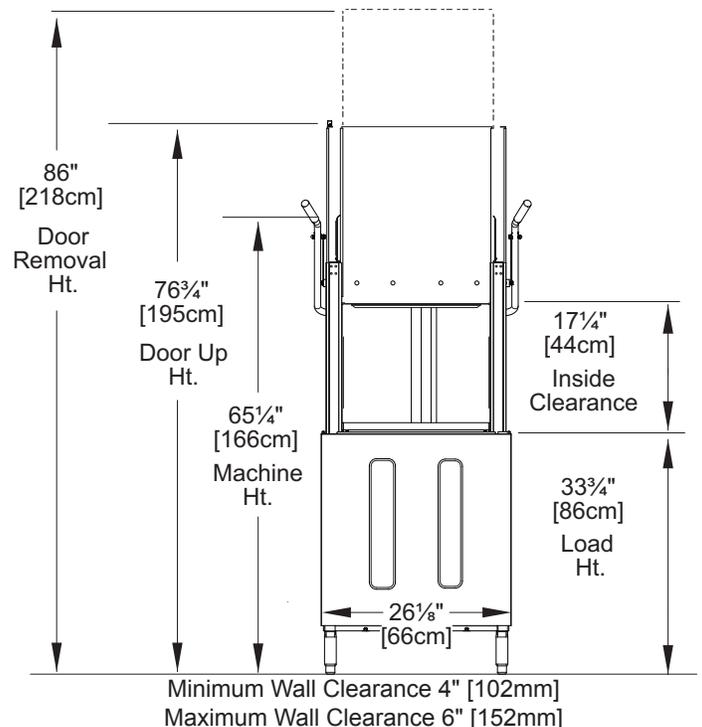
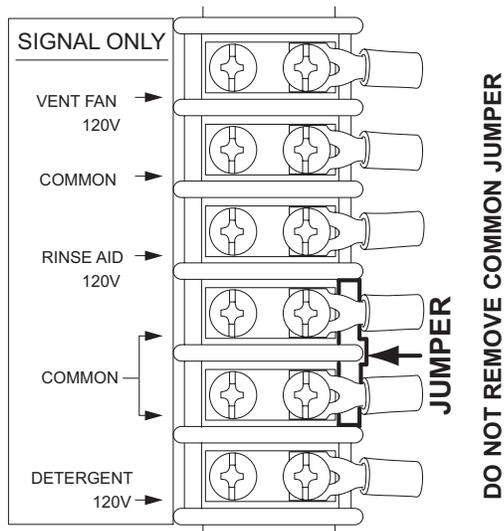


# Quick Installation Instructions

## Models DH2000 • MD2000

<b>Main Power</b> —	208-240V/60/1 or 3 PH
<b>Hot Water</b> —	3/4" NPT, 20-25 PSI flowing pressure  140°F/60°C Minimum for 40°F/22°C Rise Booster.  110°F/43°C Minimum for 70°F/39°C Rise Booster.
<b>Drain</b> —	2" [51mm] O.D. slip-fit hose
<b>Vent Fan</b> —	120VAC 1A MAX signal inside control cabinet.
<b>Detergent</b> —	Two 7/8" holes [22mm]. 120VAC 1A MAX signal inside control cabinet.
<b>Rinse-aid</b> —	1/4" [6mm] plastic plug 120VAC 1A MAX signal inside control cabinet.
<b>DO NOT REMOVE COMMON JUMPER</b>	

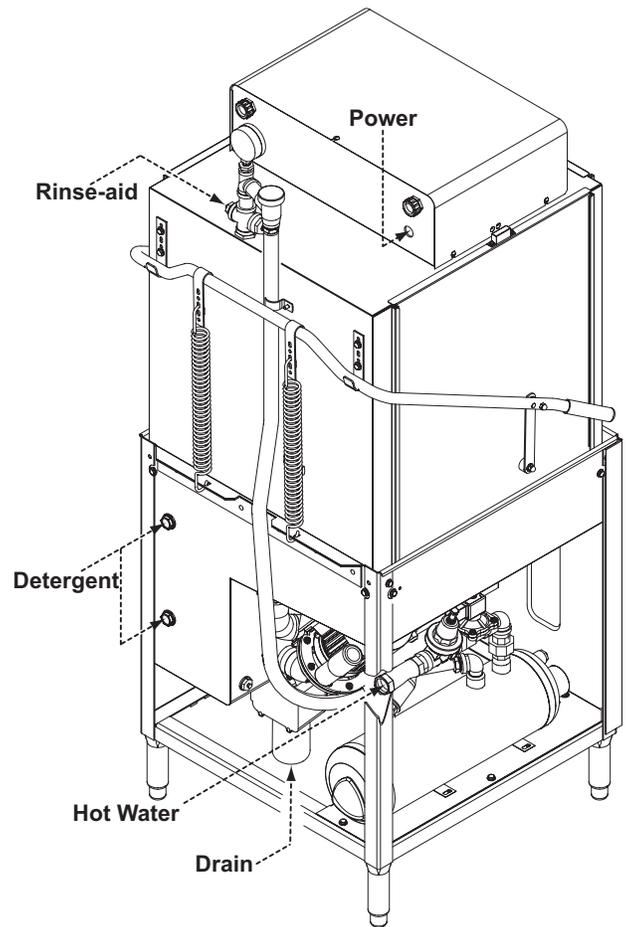

Form No. 114635\_B

**Service Connections must be performed by qualified personnel who will follow all applicable electrical, plumbing, safety and sanitary codes.**