

# nexus

by MOYER DIEBEL

Undercounter High Temperature  
Dishwashing Machine  
with Built-in Booster Heater  
Model N900



## STANDARD FEATURES

### ENERGY EFFICIENT

- ✓ Exclusive 30 amp breaker.
- ✓ Highly effective 5kW booster heater.

### FUNCTIONALITY

- ✓ "NEW" Intuitive LCD Control Display clearly identifies temperature and cycle times.
- ✓ Automatic fill at start up.
- ✓ Exclusive pumped wash pushes pressurized water through the spray arms during the wash & rinse cycles.
- ✓ Double skin counterbalanced door – an integral component made from industry leading design offers a robust quality to meet operational demand.
- ✓ AutoClean washes chamber at shutdown.
- ✓ Pumped Drain.
- ✓ 1 Year Limited Warranty (Parts & Labour).
- ✓ Complete with one peg rack.
- ✓ 100% designed and built in Canada.

### SAFETY

- ✓ Nexus Safeguard - Monitors and assures 180 °F/82°C is reached in final rinse temperature to meet NSF rated sanitization requirements.

### SERVICEABILITY

- ✓ Visual Diagnostics guide the user through every step of the **nexus** N900's operating system including immediate service feedback.
- ✓ Designed with easy access to replacement parts for ease of service.
- ✓ Reduced downtime and cost of ownership.

### INDUSTRY EXCLUSIVE - FILL AND DRAIN OPERATING PRINCIPLE

#### **What does fill and drain mean?**

The **nexus** system will automatically drain the water in the machine after every wash cycle and fill the **nexus** N900 with water prior to the rinse cycle which ensures your wares are sanitized using the cleanest water possible for industry leading wash results.

#### **Why is this important?**

**nexus** Fill & Drain Technology ensures clean water is used for every rinse cycle. The **nexus** N900 recycles this very clean rinse water for the next wash cycle which means your wares are clean and your machine is too. In addition, The **nexus** N900 undercounter maintains even water pressure during the industry exclusive pumped wash & rinse cycle. Great for heavy soil applications.

## OPTIONS & ACCESSORIES

- |   |             |
|---|-------------|
| <input type="checkbox"/> 17RS – 17" Stand     | P/N 0708757 |
| <input type="checkbox"/> Drain tempering kit  | P/N 0714380 |
| <input type="checkbox"/> Flat bottom dishrack | P/N 101273  |



Made in Canada

#### **nexus-Canada**

2674 North Service Rd, Jordan Station, Ontario, Canada L0R 1S0 Tel: 800/263-5798 Fax: 905/562-5422


[www.championindustries.com/1canada/nexus](http://www.championindustries.com/1canada/nexus)

Printed in CANADA

# nexus Undercounter Specifications

## nexus N900 Dimensions & Notes:

- Dimensions shown in inches and [millimeters]
- Allow additional 3" clearance from wall

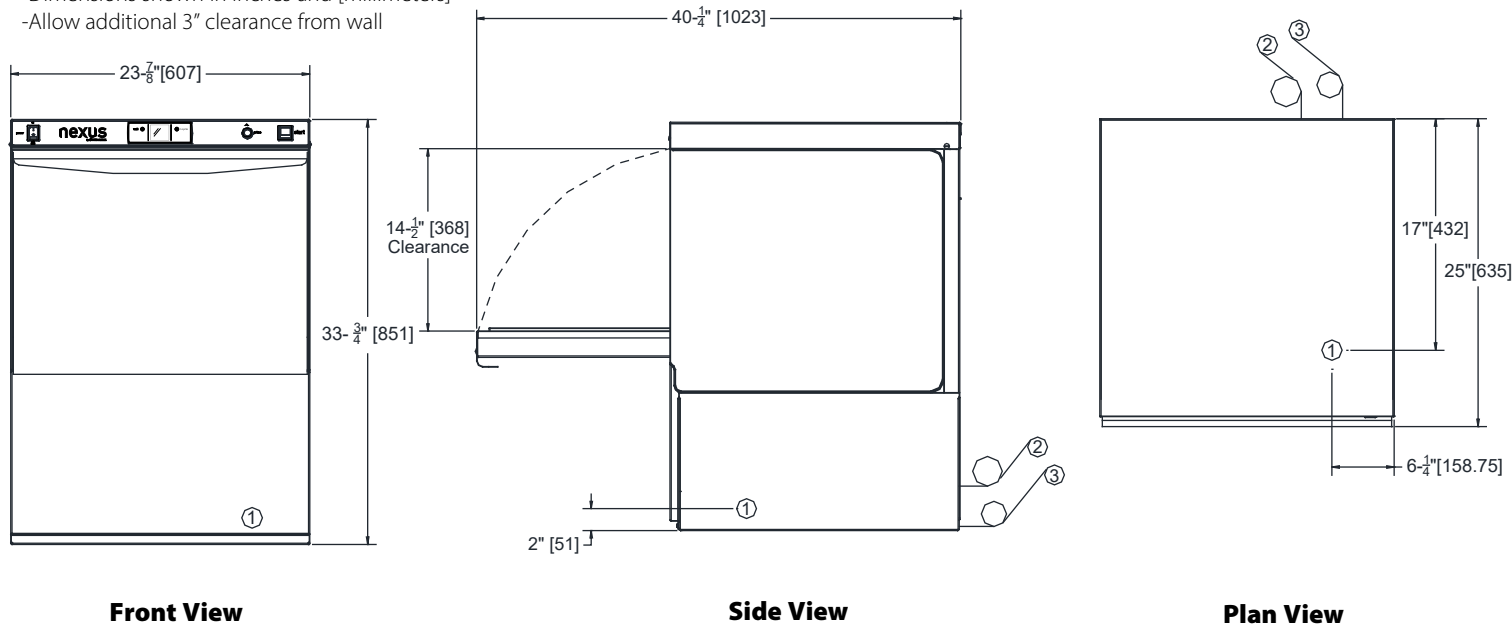

## Utilities

- 1 Electrical**  
208-230/60/1; 2 wire + ground; hard wiring required (see below)
- 2 Hot Water**  
**110°F/43°C to 140°F/60°C Min (140°F/60°C Recommended)**  
5 ft. long 1/2" I.D. flexible fill hose with 3/4" FNPT connection.  
Flow pressure: 25-95 psi (172-655 kPa)
- 3 Drain Connection**  
6 ft. long, 3/4" I.D. flexible hose.  
Max. drain flow: 8 US gpm; 7 imp gpm  
Drain height 3' -1/2" from floor.

## 5 kW Electric Booster


Elec. Specs	Rated Amps	Minimum Supply Circuit Ampacity	Maximum Overcurrent Protective Device
208/60/1	24	30	30
230/60/1	26	30	30

## Shipping Details

	Uncrated	Crated
Height	33-1/2" [850.9]	39-1/2" [1003]
Width	24" [609]	25" [635]
Depth	25" [635]	25-1/2" [647]
Ship Wt. lbs	148/67	165/75

## Electrical Supply Details

Electrical supply service must be a 2-wire plus ground for connection as shown



## SPECIFICATIONS

<b>Capacity</b>	
Racks per hr. *	24
<b>Motor Horsepower</b>	
Wash	1
<b>Water Consumption</b>	
Gal. per hr. (max. use)	
US gal. (imp gal/liters)	28 (23.3/106)
Gal. per rack	
US gal. (imp gal/liters)	1.4 (1.16/5.3)
<b>Temperatures °F/°C</b>	
Wash (minimum)	150/66
Rinse (minimum)	180/82
<b>Heating</b>	
Tank heat, electric (kW)	2
Electric booster (kW)	5
<b>Time Cycle in Seconds</b>	
Wash	90
Rinse	15
Dwell	45
Total	150

\* Excludes 30 second NSF load/unload time

**Warning:** Plumbing and electrical connections should be made by qualified personnel who will observe all the applicable plumbing, sanitary and safety codes.