



**Simply Engineered Better**

## RBW-100LT

Low Temperature Sanitizing

### RETAIL BASKET WASHER

**SANITIZE YOUR RETAIL BASKETS**

#### STANDARD FEATURES

- Certified to NSF standard #3 for 5 log pathogen reduction
- Max basket size 20" x 20" x 15-1/2"
- Machine use by Operator only (employee)
- Industry exclusive high grade 316 stainless steel
- "Vari-cycle" button. Allows unlimited number of user selectable cycle times
- Delime cycle
- Auto-clean cycle
- Micro-computer solid-state controls
- Soft start provides gradual and quiet pump
- Fill and drain type operation. Rinse water always re-used as next cycle's wash water. Low 1.5 imp gal (7L) water usage per rack.
- Electric tank heater (.75 kW)
- Liquid detergent, sanitizer and dispensing pumps complete with prime switches
- Flexible fill and drain lines, flow regulator/line strainer and standard pumped drain for total ease of installation
- Large 15-3/4" [400mm] door opening
- Rugged, counter-balanced, double skin door, for quieter operation
- 1 year parts and labour warranty



**COVID-19 Fighter**  
Sanitized in 141 seconds!




#### OPTIONS & ACCESSORIES

- |  |             |
|--|-------------|
| <input type="checkbox"/> 6" Stand                    | P/N 0712393 |
| <input type="checkbox"/> 17RS – 17" Stand            | P/N 0708757 |
| <input type="checkbox"/> Kit, Drip Tray Undercounter | P/N 0714208 |

Moyer Diebel Ltd. – Canada

2674 North Service Rd., Jordan Station, Ontario, Canada L0R 1S0 Tel: 800/263-5798 Fax: 905/562-4618  
sales@moyerdiebellimited.com

Dimensions shown in inches and [millimeters]

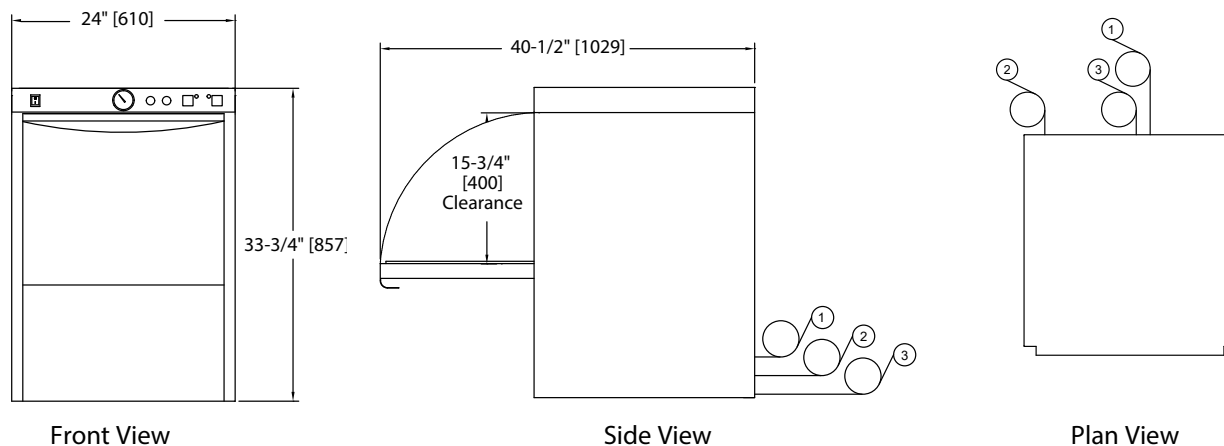

### Utilities

#### 1 Electrical Connection

115/60/1; 12 amp draw; to be fused at 15 amp. 4ft. plug-in cord supplied.

#### 2 Water Connection

140°F Min., 1/2" supply hot water connection  
6 ft. long, 1/2" I.D. flexible fill hose with 3/4" hose connector  
Flow pressure: 25-95 psi (173-656 kPa)

#### 3 Drain Connection

6 ft. long, 5/8" I.D. flexible drain hose  
Max. drain flow: 7 imp.gpm; 30 lpm

### SPECIFICATIONS

#### Capacity

Baskets Per Hour Up to 50

#### Motor Horsepower

Wash 1

#### Water Consumption

Imp.gal./liters per hr. (max. use) 31.9/145

Imp.gal./liters per rack 1.5/6.8

#### Temperatures °F/°C

Wash (minimum) 140°/60°

Rinse (minimum) 140°/60°

#### Heating

Tank heat, electric (kW) .75

#### Time Cycle in Seconds

Wash 90

Rinse 26

Drain/fill 25

Total 141

	Uncrated	Crated
Height*	33-3/4"	39-1/2"
Width	24"	25"
Depth	25"	25-1/2"
Ship Wt. lbs	178	198

\* Front leveling feet provided.

Due to an ongoing value analysis program at Moyer Diebel, specifications in this catalog are subject to change without notice.

**Warning:** Plumbing and electrical connections should be made by qualified personnel who will observe all the applicable plumbing, sanitary and safety codes.

#### Moyer Diebel – Canada

2674 N. Service Rd, Jordan Station, Ontario, Canada L0R 1S0  
800/263-5798 • Fax: 905/562-5422

ChampionIndustries.com/1canada • sales@moyerdiebellimited.com